





BASE

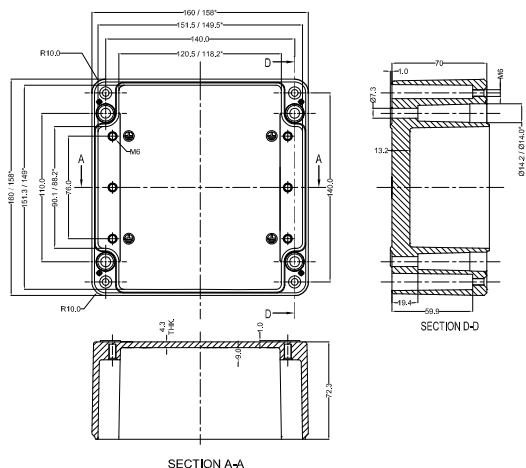

LID

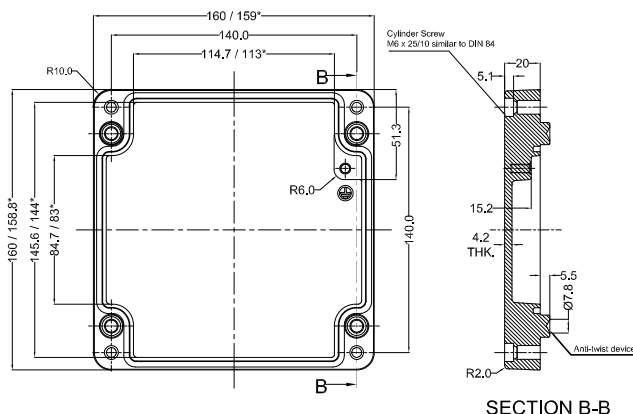

PRODUCT SPECIFICATION - EX

Dim (LxWxH):	160 X 160 X 91
Model No:	EX-AJB16016091-U
Order No :	EXRJ15
Weight (gm):	1538

TECHNICAL SPECIFICATION

Material:	AlSi 12
Colour:	RAL 7001, 7031, 7032, 7035, 7038, Black RAL 9004, White RAL 9010
Protection:	IP 66, EN 60529
Gasket:	Silicone
Lid Screw:	Captive Screw - SS1.4301 (A2) - M6
Tightening Torque	3 to 4 Nm
Impact Strength	Impact Energy 10 Joules - IK 09 EN 60068-2-75
Service Temperature	-50°C to +135°C
Surface:	Painted / Non - Painted
Components	Fastening threads M6 in the enclosure bottom
Process Control System	ISO 9001 - 2015, IEC 80079 - 34 - 2011

AVAILABLE ON DEMAND

DIN Rail	TS 35
Mounting Plate	Yes

MAXIMUM NO. OF TERMINALS

Cross Section (Sq. mm)	1.5	2.5	4	6	10	16	25	35	50	70
Qty	255	207	174	129	23	20	23	23	16	16

MAXIMUM NO. OF THREADED HOLES

Opening Details	M12	M16	M20	M25	M32	M40	M50	M63
Face A/B	11	11	8	5	3	2	2	0
Face C/D	7	7	6	3	2	1	0	0

* Maximum No. of terminals depends on internal fitting