

# Product datasheet

Specifications



## Contactor, TeSys Deca, 3P(3 NO), AC-3/AC-3e, 0 to 440V, 40A, 110VAC 50/60Hz coil

LC1D40AF7

### Main

Range	TeSys TeSys Deca
Range of product	TeSys Deca
Product or component type	Contactor
Device short name	LC1D
Contactor application	Resistive load Motor control
Utilisation category	AC-4 AC-1 AC-3 AC-3e
Poles description	3P
[Ue] rated operational voltage	Power circuit: <= 690 V AC 25...400 Hz Power circuit: <= 300 V DC
[Ie] rated operational current	60 A (at <60 °C) at <= 440 V AC AC-1 for power circuit 40 A (at <60 °C) at <= 440 V AC AC-3 for power circuit 40 A (at <60 °C) at <= 440 V AC AC-3e for power circuit
[Uc] control circuit voltage	110 V AC 50/60 Hz

### Complementary

Motor power kW	18.5 kW at 380...400 V AC 50/60 Hz (AC-3) 11 kW at 220...230 V AC 50/60 Hz (AC-3) 22 kW at 415...440 V AC 50/60 Hz (AC-3) 22 kW at 500 V AC 50/60 Hz (AC-3) 30 kW at 660...690 V AC 50/60 Hz (AC-3) 9 kW at 400 V AC 50/60 Hz (AC-4) 18.5 kW at 380...400 V AC 50/60 Hz (AC-3e) 11 kW at 220...230 V AC 50/60 Hz (AC-3e) 22 kW at 415...440 V AC 50/60 Hz (AC-3e) 22 kW at 500 V AC 50/60 Hz (AC-3e) 30 kW at 660...690 V AC 50/60 Hz (AC-3e)
Motor power hp	5 hp at 230/240 V AC 50/60 Hz for 1 phase motors 10 hp at 230/240 V AC 50/60 Hz for 3 phases motors 30 hp at 575/600 V AC 50/60 Hz for 3 phases motors 10 hp at 200/208 V AC 50/60 Hz for 3 phases motors 3 hp at 115 V AC 50/60 Hz for 1 phase motors 30 hp at 460/480 V AC 50/60 Hz for 3 phases motors
Compatibility code	LC1D
Pole contact composition	3 NO
Contact compatibility	M2
Protective cover	With

<b>[I<sub>th</sub>] conventional free air thermal current</b>	10 A (at 60 °C) for signalling circuit 60 A (at 60 °C) for power circuit
<b>I<sub>rms</sub> rated making capacity</b>	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 800 A at 440 V for power circuit conforming to IEC 60947
<b>Rated breaking capacity</b>	800 A at 440 V for power circuit conforming to IEC 60947
<b>[I<sub>cw</sub>] rated short-time withstand current</b>	320 A 40 °C - 10 s for power circuit 720 A 40 °C - 1 s for power circuit 72 A 40 °C - 10 min for power circuit 165 A 40 °C - 1 min for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
<b>Associated fuse rating</b>	10 A gG for signalling circuit conforming to IEC 60947-5-1 80 A gG at <= 690 V coordination type 1 for power circuit 80 A gG at <= 690 V coordination type 2 for power circuit
<b>Average impedance</b>	1.5 mOhm - I <sub>th</sub> 60 A 50 Hz for power circuit
<b>Power dissipation per pole</b>	2.4 W AC-3 5.4 W AC-1 2.4 W AC-3e
<b>[U<sub>i</sub>] rated insulation voltage</b>	Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Signalling circuit: 690 V conforming to IEC 60947-1 Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified Power circuit: 690 V conforming to IEC 60947-4-1
<b>Overvoltage category</b>	III
<b>Pollution degree</b>	3
<b>[U<sub>imp</sub>] rated impulse withstand voltage</b>	6 kV conforming to IEC 60947
<b>Safety reliability level</b>	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
<b>Mechanical durability</b>	6 Mcycles
<b>Electrical durability</b>	1.4 Mcycles 60 A AC-1 at U <sub>e</sub> <= 440 V 1.5 Mcycles 40 A AC-3 at U <sub>e</sub> <= 440 V 1.5 Mcycles 40 A AC-3e at U <sub>e</sub> <= 440 V
<b>Control circuit type</b>	AC at 50/60 Hz standard
<b>Coil technology</b>	Without built-in suppressor module
<b>Control circuit voltage limits</b>	0.3...0.6 U <sub>c</sub> (-40...70 °C):drop-out AC 50/60 Hz 0.8...1.1 U <sub>c</sub> (-40...60 °C):operational AC 50 Hz 0.85...1.1 U <sub>c</sub> (-40...60 °C):operational AC 60 Hz 1...1.1 U <sub>c</sub> (60...70 °C):operational AC 50/60 Hz
<b>Inrush power in VA</b>	140 VA 60 Hz cos phi 0.75 (at 20 °C) 160 VA 50 Hz cos phi 0.75 (at 20 °C)
<b>Hold-in power consumption in VA</b>	13 VA 60 Hz cos phi 0.3 (at 20 °C) 15 VA 50 Hz cos phi 0.3 (at 20 °C)
<b>Heat dissipation</b>	4...5 W at 50/60 Hz
<b>Operating time</b>	4...19 ms opening 12...26 ms closing
<b>Maximum operating rate</b>	3600 cyc/h 60 °C
<b>Connections - terminals</b>	Control circuit: screw clamp terminals 2 1...2.5 mm <sup>2</sup> - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: solid without cable end Control circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: solid without cable end Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: flexible without cable end Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: flexible without cable end Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: flexible with cable end Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: flexible with cable end Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: solid without cable end Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: solid without cable end
<b>Tightening torque</b>	Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 8 N.m - on EverLink BTR screw connectors - cable 25...35 mm <sup>2</sup> hexagonal screw head 4 mm

Power circuit: 5 N.m - on EverLink BTR screw connectors - cable 1...25 mm<sup>2</sup> hexagonal screw head 4 mm  
 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver pozidriv No 2  
 Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver pozidriv No 2

<b>Auxiliary contact composition</b>	1 NO + 1 NC
<b>Auxiliary contacts type</b>	type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1
<b>Signalling circuit frequency</b>	25...400 Hz
<b>Minimum switching voltage</b>	17 V for signalling circuit
<b>Minimum switching current</b>	5 mA for signalling circuit
<b>Insulation resistance</b>	> 10 MΩ for signalling circuit
<b>Non-overlap time</b>	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
<b>Mounting support</b>	Rail Plate

## Environment

<b>Standards</b>	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 IEC 60335-1
<b>Product certifications</b>	CCC CSA GOST UL
<b>IP degree of protection</b>	IP20 front face conforming to IEC 60529
<b>Protective treatment</b>	TH conforming to IEC 60068-2-30
<b>Climatic withstand</b>	conforming to IACS E10 exposure to damp heat conforming to IEC 60947-1 Annex Q category D exposure to damp heat
<b>Permissible ambient air temperature around the device</b>	-40...60 °C 60...70 °C with derating
<b>Operating altitude</b>	0...3000 m
<b>Fire resistance</b>	850 °C conforming to IEC 60695-2-1
<b>Flame retardance</b>	V1 conforming to UL 94
<b>Mechanical robustness</b>	Vibrations contactor open (2 Gn, 5...300 Hz) Vibrations contactor closed (4 Gn, 5...300 Hz) Shocks contactor closed (15 Gn for 11 ms) Shocks contactor open (10 Gn for 11 ms)
<b>Height</b>	122 mm
<b>Width</b>	55 mm
<b>Depth</b>	120 mm
<b>Product weight</b>	0.85 kg

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	6.2 cm
<b>Package 1 Width</b>	13.5 cm
<b>Package 1 Length</b>	15.5 cm
<b>Package 1 Weight</b>	920.0 g
<b>Unit Type of Package 2</b>	P06
<b>Number of Units in Package 2</b>	160

<b>Package 2 Height</b>	75.0 cm
<b>Package 2 Width</b>	80.0 cm
<b>Package 2 Length</b>	60.0 cm
<b>Package 2 Weight</b>	166.34 kg


## Offer Sustainability

<b>Sustainable offer status</b>	Green Premium product
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>REACH free of SVHC</b>	Yes
<b>EU RoHS Directive</b>	Compliant <a href="#">EU RoHS Declaration</a>
<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
<b>RoHS exemption information</b>	Yes
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>Circularity Profile</b>	<a href="#">End of Life Information</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
<b>PVC free</b>	Yes

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------


## Dimensions

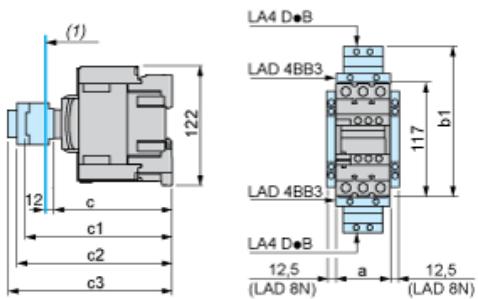

## (1) Minimum electrical clearance

LC1		D40A...D65A
<b>a</b>		55
<b>b1</b>	with LA4 D•2	–
	with LA4 DB3 or LAD 4BB3	136
	with LA4 DF, DT	157
	with LA4 DM, DW, DL	166
<b>c</b>	without cover or add-on blocks	118
	with cover, without add-on blocks	120
<b>c1</b>	with LAD N (1 contact)	–
	with LAD N or C (2 or 4 contacts)	150
<b>c2</b>	with LA6 DK10, LAD 6DK	163
<b>c3</b>	with LAD T, R, S	171
	with LAD T, R, S and sealing cover	175

Wiring



Recommended replacement(s)