

Head for key selector switch, Harmony XB4, metal, black, 22mm, key 455,3 positions, stay put

ZB4BG5

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XB4		
Product or Component Type	Head for key selector switch		
Device short name	ZB4		
Bezel material	Chromium plated metal		
Mounting diameter	0.9 in (22 mm)		
Head type	Standard		
Sale per indivisible quantity	1		
Shape of signaling unit head	Round		
Operator profile	Black key switch		
Operator position information	3 positions +/- 45°		
Type of Keylock	Key 455		
Key withdrawal position	Left and right		

Complementary

CAD overall width	1.1 in (29 mm)			
CAD overall height	1.1 in (29 mm)			
CAD overall depth	2.8 in (72 mm)			
Net Weight	0.216 lb(US) (0.098 kg)			
Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m			
Mechanical durability	1000000 cycles			
Electrical composition code	C3 6 single front mounting C4 6 single and double front mounting C5 5 single front mounting C6 5 single and double front mounting C7 4 single front mounting C8 4 single and double front mounting C11 3 single front mounting			
Device presentation	Basic element			

Environment

Protective treatment	тн
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)
Ambient air temperature for operation	-40158 °F (-4070 °C)
Overvoltage category	Class I conforming to IEC 60536

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

IP degree of protection	IP66 IEC 60529				
	IP67				
	IP69				
	IP69K				
	1F 091/				
NEMA degree of protection	NEMA 13				
	NEMA 4X				
IK degree of protection	IK06 with keyhole cover ZBGP conforming to IEC 50102				
Standards	EN/IEC 60947-5-4				
	EN/IEC 60947-5-1				
	CSA C22.2 No 14				
	GB 14048.5				
	EN/IEC 60947-1				
	EN/IEC 60947-5-5				
	UL 508				
	OL 300				
Product Certifications	CSA				
	DNV				
	BV				
	LROS (Lloyds register of shipping)				
	UL Listed				
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6				
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27				
	50 gn 11 ms) half sine wave acceleration IEC 60068-2-27				

Ordering and shipping details

Category	US10CS222468			
Discount Schedule	0CS2			
GTIN	3389110889239			
Returnability	Yes			
Country of origin	FR			

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.46 in (8.8 cm)
Package 1 Width	2.05 in (5.2 cm)
Package 1 Length	1.30 in (3.3 cm)
Package 1 Weight	3.6 oz (103 g)
Unit Type of Package 2	S03
Number of Units in Package 2	100
Package 2 Height	11.81 in (30 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	23.764 lb(US) (10.779 kg)

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∇ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	F28cb399-1b6a-409d-ac7b-4169e47b25c8
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No

ZB4BG5

Dimensions Drawings

Dimensions

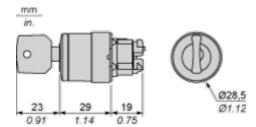



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

Connection by Faston Connectors






- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

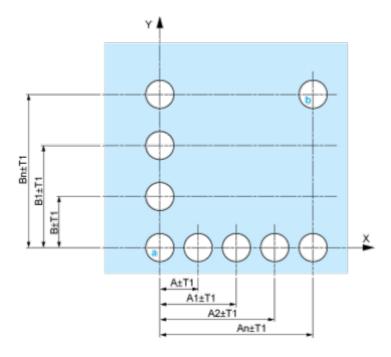


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

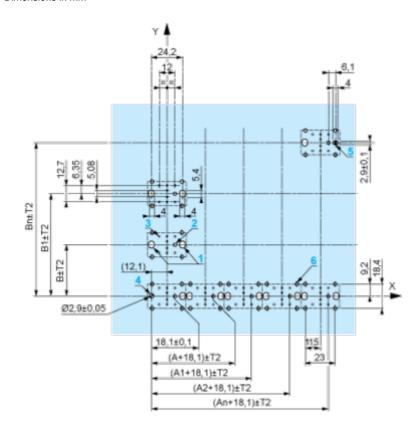

A: 30 mm min. B: 40 mm min. Dimensions in in.

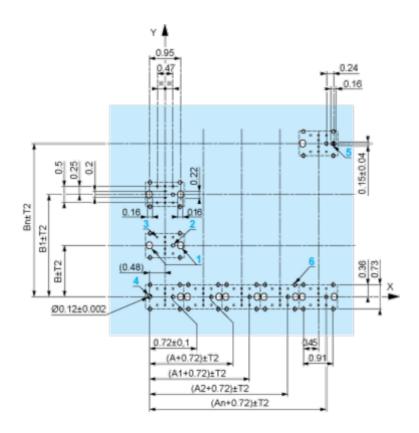

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

ZB4BG5

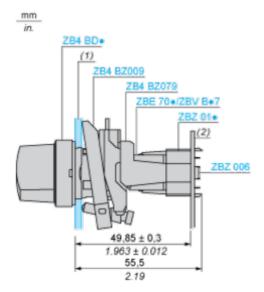

- (1) Panel
- (2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- $_{ullet}$ 4 1 hole Ø 2.9 mm \pm 0.05 / 0.11 in. \pm 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- . 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01∙

Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.

ZB4BG5

Technical Description






ZB4BG5





ZB4BG5





ZB4BG5

Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



	Position	Тор			
Push		Bottom			
	Location		Left	Centre	Right
	State		1	1	0
Contacts	N/O		closed	closed	open
	N/C		open	open	closed

Position 0°



Push	Position	Тор			
		Bottom			\triangle
	Location		Left	Centre	Right
	State		О	О	0
Contacts	N/O		open	open	open
	N/C		closed	closed	closed


Position 45°




	Position	Тор			
Push		Bottom	Δ		
	Location		Left	Centre	Right
	State		0	1	1
0	N/O		open	closed	closed
Contacts	N/C		closed	open	open

Technical Illustration

Dimensions








	a (mm)	a (in.)	p (mm)	b (in.)
ZBE ZBV	40	1.57	30	1.18
ZBE3 ZBV	45	1.77	32	1.26
ZBE4 ZBV		1.57	30	1.18
ZBE S ZBV	50	1.97	30	1.18
ZBE9 ZBV	40	1,57	30	1,18
ZBRT• ZBR	nage .	1.57	30	1.18

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB4

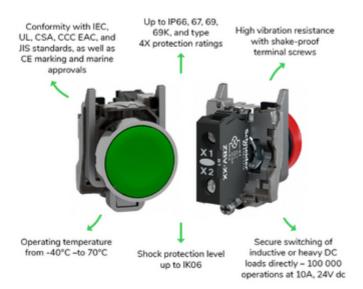

Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative







